


HP Clamp



Hydraulic Pipe Clamp

HD Clamp

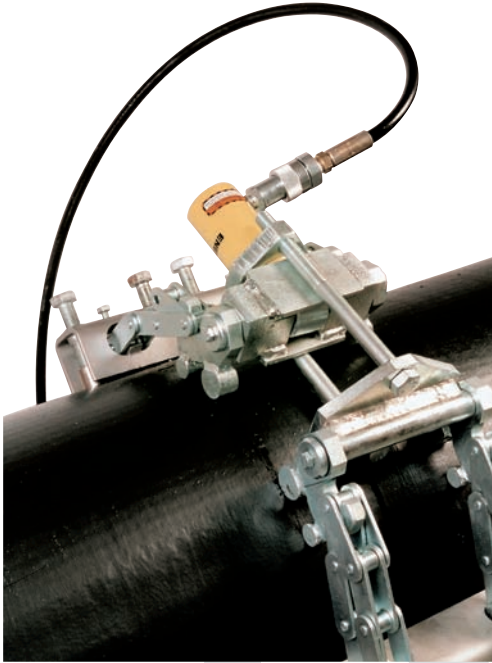

Manual Pipe Clamp

The “easy-to-handle”, flexible system to be used for pipe-to-pipe, pipe-to-bend and pipe-to-tee or flange - align and adjust and ready to weld in less than 10 minutes!

The HP Clamp is the only hydraulic chain clamp in the world which can operate on pipe diameters from 6” (168 mm) to 60” (1524 mm). The HP Clamp is able to align and adjust pipes and fittings with wall thickness up to 1” (25 mm) HD up to 20 mm.


To meet the requirements from pipe manufacturers, nuclear, offshore and petrochemical industries, all parts of the HP Clamp that makes contact with the pipes, are made of stainless steel to avoid markings and contamination on the pipes.

The jack-bars are adjustable and removable. This makes the HP Clamp usable on smaller pipe dimensions.

The HP Clamp consists of:

1 Hydraulic cylinder, 1 Clamping system, 1,8 m hose, 1 Hydraulic hand pump, Jack-bars (number according to size), mounted on two chains, 1 Ratchet brace 10 mm, 1 Ratchet brace 24 mm, 1 Aluminium tool box.

All HP+HD Clamps are available with extra chain for all pipe-diameters and extra jack-bars. Other sizes on request.

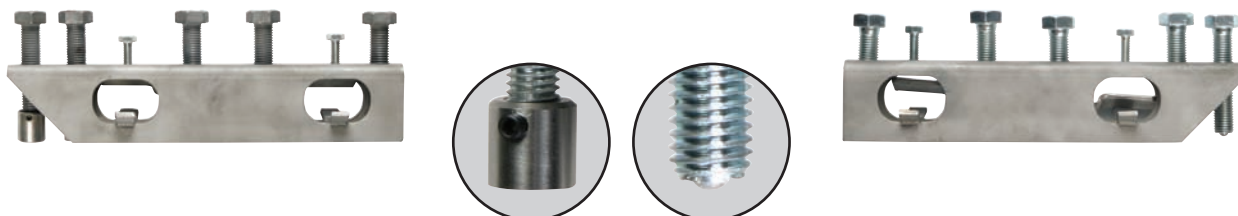

Choice of two different alignment screws

- Cylinder, plain • Ball-point

HP Clamp

Cat.no.	Range	No. of jack-bars	Weight ex. pump		Shipping weight		Extra chain (set of 2)
			kg	lb	kg	lb	
HP616	6 - 16"	5	33	66	45	90	HP16
HP620	6 - 20"	6	38	76	51	102	HP20
HP624	6 - 24"	7	43	86	54	108	HP24
HP632	6 - 32"	9	50	100	63	126	HP32
HP636	6 - 36"	10	53	106	67	134	HP36
HP642	6 - 42"	11	60	120	71	144	HP42
HP648	6 - 48"	12	64	128	76	152	HP48
HP656	6 - 56"	14	73	146	86	172	HP56
HP660	6 - 60"	15	78	156	91	182	HP60

HD Clamp

Cat.no.	Range	No. of jack-bars	Weight		Shipping weight		Extra chain (set af 2)
			kg	lb	kg	lb	
HD1216	12 - 16"	5	26	52	38	76	HP16
HD1220	12 - 20"	6	31	62	44	88	HP20
HD1224	12 - 24"	7	36	72	47	94	HP24
HD1232	12 - 32"	9	43	86	56	112	HP32
HD1236	12 - 36"	10	46	92	60	120	HP36
HD1242	12 - 42"	11	53	106	64	128	HP42
HD1248	12 - 48"	12	57	114	69	138	HP48
HD1256	12 - 56"	14	66	132	79	158	HP56
HD1260	12 - 60"	15	71	142	84	168	HP60