


WT Clamp

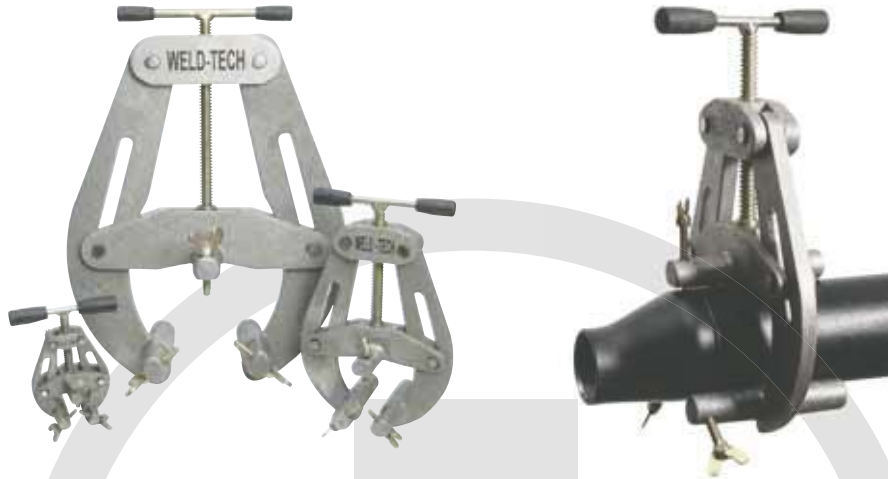

**LIFETIME
 WARRANTY
 ON BROKEN PARTS**

Due to its unique design, WT Clamp ensures that the clamping forces are evenly spread round the pipe to be welded, because the distance between clamping points are exactly the same. This is true for all pipe dimensions within the range of the WT Clamp (1 to 14 inches).

The adjusting screws have stainless steel balls at their ends. This eliminates the scratching of the objects to be welded, and no corrosion will occur.

The arms are made of casted aluminium which allows a clamping force to meet the requirements for all pipe dimensions within the range of the WT Clamp (27 – 355 mm) and with wall thickness of up to 15 mm.

WT Clamp can be used for the welding of all kinds of materials such as carbon steel, stainless steel, duplex, super duplex and titanium.

The welding of pipe to pipe and pipe to fittings are easily performed with WT Clamp.

Cat. No.	Range (inch)	Range (mm)	Weight (kg)	Weight (lbs)
WT125	1 - 2,5	27 - 64	0.75	1,50
WT26	2 - 6	60 - 168	2.60	5,20
WT612	6 - 14	168 - 355	7.50	15,00